

GPMCO CORRUGATED SLURRY/MATERIAL HANDLING HOSE

- Corrugated Discharge/Vacuum hose for transferring highly abrasive slurries.
- Designed for on the job engineering of specified lengths. Hose can be cut, coupled, and installed in minutes at the job site with our split-lok flange coupling system.




Tube:	7/16" Natural Rubber.
Reinforcement:	High Strength tire cord with steel wire helix.
Cover:	Corrugated SBR.
Pressure Rating:	150psi.
Stocked Sizes:	3", 4", 6" & 8"

****Stocked in 50' Sections****

****Custom Lengths Available****

****Field Adjustable****

SPLIT-LOC FLANGE

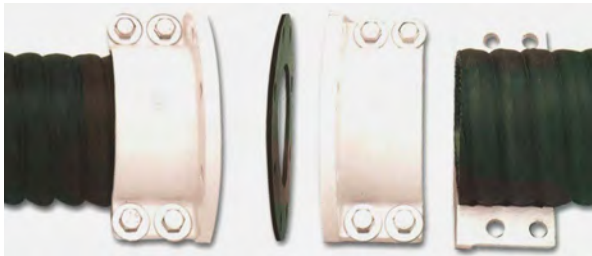

Split-Loc Flanges are a 2-piece reusable coupling system is attached eternally with compression bolts and allows the user to fabricate assemblies in the field. This unique full-flow coupling system provides excellent coupling retention and can be used continuously at 150psi. Designed for a larger bore material transfer hose. Flanges are stocked in aluminum. Other materials are available.



www.GPMCO.com

GPM inc
4432 Venture Ave. Duluth, MN 55811
Ph: (218) 722-9904 Fx: (218) 722-2826
Web: www.gpmco.com or www.eliminatorpumps.com